

10 kW | 34 000 Btu

# PUMPKIN® 10

Level-entry Mini-Condensate Pump



**9 l/h**  
2,4 gal/h



**10 m**  
32,8 ft



**29 db(A) DIN EN 3745**  
~ < 23 db(A) DIN EN 3744

## Description

The PUMPKIN®10 consists of a pump unit and a 3-level float switch that controls the pump (switching on and off). The transparent floater is connected directly to the outlet pipe of the condensate vessel or to the end of the outflow line. The supplied package includes the pump, the 3-level float switch and mounting accessories, i.e. double-sided-padded tape to attach the float switch, an anti-vibration mount for the pump and a floater inlet hose.


## Usage

The PUMPKIN®10 is the ideal choice for use in air conditioning systems. With its extreme slim design and low noise level, it is the perfect fit for air conditioners with limited space.

## Special features

- extrem slim design
- affordable
- reliable

## Performance

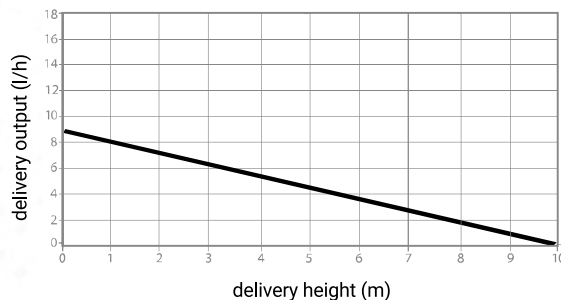



### Inside the box

- pump block with vibration dampers
- three-stage float switch with dirt retainer
- PVC vent hose
- 2x double sided padded tape
- silicon hose (internal diameter 15 mm, length 40mm - connects to split drain hose)



### Technical data

For air conditioners up to [kW]	10
Drive	Solenoid pump
Mains voltage & frequency	230V, 50/60Hz
Power consumption [W]	Operation: 15   Standby: 1
Max. flow rate [l/h]	9
Max. delivery height [m]	10
Max. suction height [m]	1,5
Pump unit L x W x H [mm]	151 x 33 x 33
Float switch L x W x H [mm]	82 x 39 x 39
Switch points float switch [mm]	Alarm: max. 23 Start: 20 ±1 Stop: 15 ±1
Pressure, suction hose [mm]	6 x 1,5