


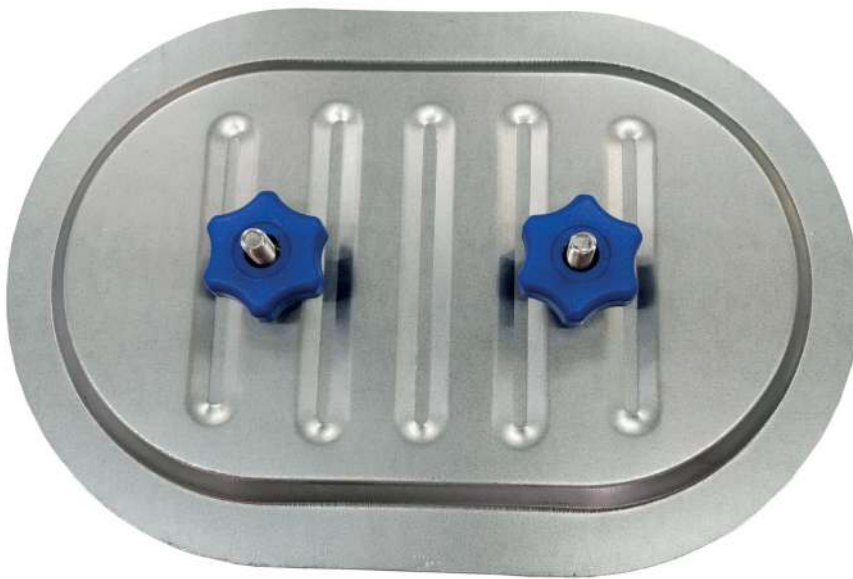

Flat oval sandwich access doors type ADAR

Non insulated access door for rectangular duct

Brand

- SUFIX

Application


- To give easy access to rectangular duct

Material

- Galvanized
- Airtight sealing on the inner part of the sandwich door

Specifications

- Sandwich-type
- Template for cutting included
- Airtight upto 2000 Pa in overpressure and 750 Pa in underpressure
- Oval shape
- Airtightness class C according EN 15727

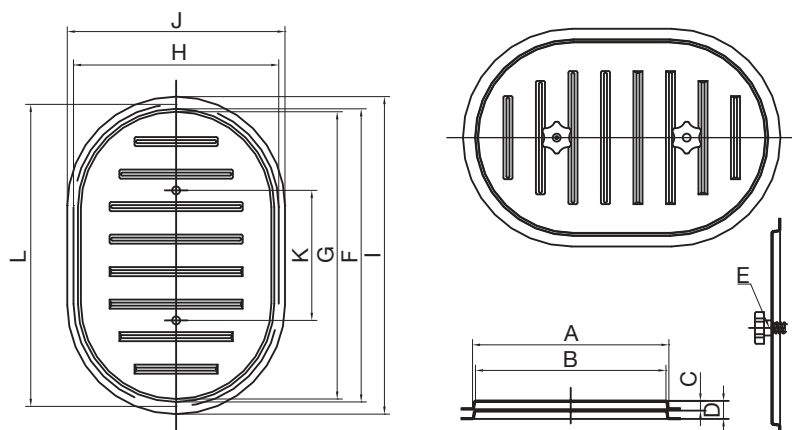

Duct accessories

Dimensions													
	L x H [mm]	A [mm]	B [mm]	C [mm]	D [mm]	E [mm]	F [mm]	G [mm]	H [mm]	I [mm]	J [mm]	K [mm]	L [mm]
ADAR-180	180 x 80	74	57.50	4.8	12.3	M8x50	166	150	80	196.8	102.7	100	180
ADAR-250	250 x 150	150	133	6.8	14.3	M8x50	246	230	150	274	186.5	95	250
ADAR-300	300 x 200	201	185	6.8	14.6	M8x50	302	283	200	328.5	228	134.5	300
ADAR-400	400 x 300	290	273	7.5	17.5	M10x50	389	373	300	414	313.5	172	400
ADAR-500	500x400	NNB	NNB	NNB	NNB	NNB	NNB	NNB	NNB	NNB	NNB	NNB	NNB
ADAR-600	600x450	NNB	NNB	NNB	NNB	NNB	NNB	NNB	NNB	NNB	NNB	NNB	NNB