



## Insulated flat access doors type IPD

Access door

### Brand

- SUFIX

### Application


- To give access into a rectangular duct

### Material

- Galvanized access door with a double-sided panel insulated with 25 mm of glassfiberwool

### Specifications

- Double-sided panel
- Glasswool insulation of 25 mm
- Quick-acting closures

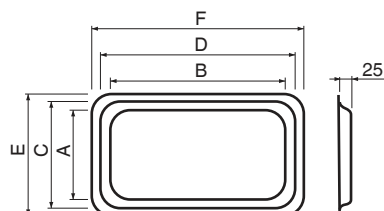



IPD-0



IPD-1



IPD-2



IPD-3

|       | Dimensions |        |        |        |        |        |
|-------|------------|--------|--------|--------|--------|--------|
|       | A (mm)     | B (mm) | C (mm) | D (mm) | E (mm) | F (mm) |
| IPD-0 | 463        | 608    | 500    | 649    | 548    | 699    |
| IPD-1 | 327        | 463    | 368    | 500    | 418    | 548    |
| IPD-2 | 198        | 332    | 240    | 375    | 286    | 422    |
| IPD-3 | 116        | 206    | 150    | 240    | 185    | 288    |