



Fire resistant air valves type KSOF-C

Application

- CE marked fire damper valve KSOF is an exhaust valve, used to prevent spreading of fire and smoke to duct systems. KSOF has a low sound level and good natural sound attenuation. A springloaded fuse will close the valve when temperature reaches the fusible link rating, 70 °C.
- For fire compartmentation in walls with fire resistance of 1 hour

Material

- Steel


Colour

- White, RAL 9010

Mounting

- To be mounted within the galvanized steel mounting frame by turning

Fireproof air valves

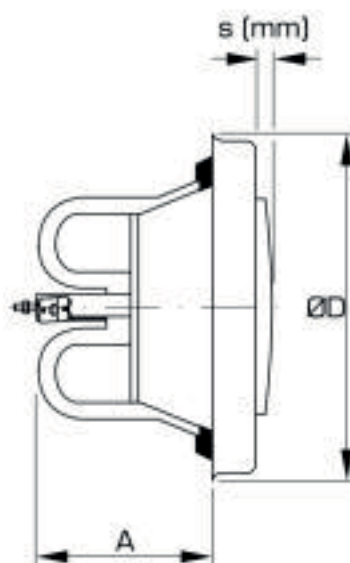

KSOF-C	Dimensions		
	ØD [mm]	A [mm]	Gewicht (g)
100	134	74	300
125	160	85	380
150	191	89	500
160	191	89	500
200	241	107	720