



Electrical battery module type MVX-BE


Electrical heating battery module

Composition

- Electrical resistances in reinforced stainless steel, blades in stainless steel
- Connections: on right or left (on right as standard)
- Filtration: this module can be equipped with a **G4** or **F7** filter
- Filter sliding rails with lip seals
- The battery is equipped with:
 - Thermal security with manual restart, 95°C
 - Thermal security with auto-restart, adjustable 0-90°C
- Note: please respect a minimum air speed of 1.2 m/s
- Supplied as a separate component, unmounted; factory mounted upon request

Connections of the battery

- MVX-BE 4 025: 1 x 230V
- All other types: 3 x 400V

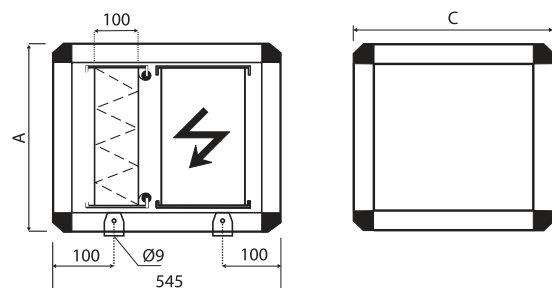

	Dimensions		
	A [mm]	C [mm]	[kg]
MVX-BE 4	445	445	34
MVX-BE 5	545	545	44
MVX-BE 6	645	645	55
MVX-BE 7	745	745	66
MVX-BE 8	845	970	90
MVX-BE 9	945	1170	113