


- Clamping strips
- Mounting accessories
- Nylon clamps

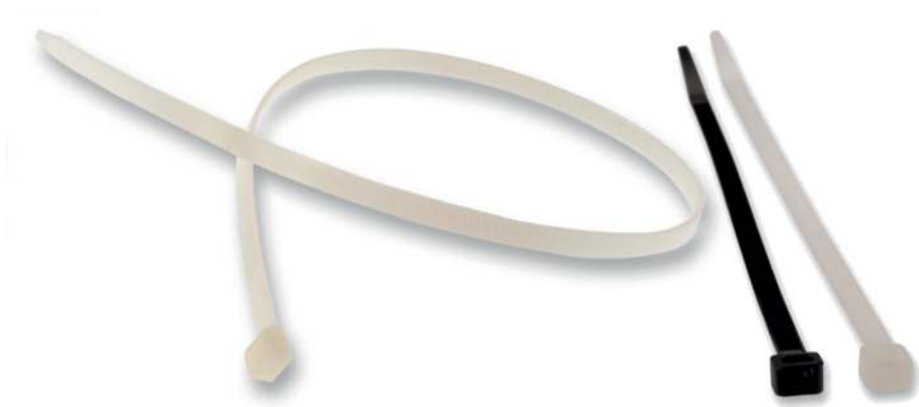

Nylon straps type NCA

Nylon clamps

Brand

- SUFIX

Application


- To fix and connect flexible ducts
- Allround fixing purposes

Composition

- Made of high strength nylon
- Flame class UL-94V-2, self -extinguishing, fungus inert
- Working temperature from -15 to 85°C

Accessories

- To use with **TNK1** for tighten and cut off nylon clamps.

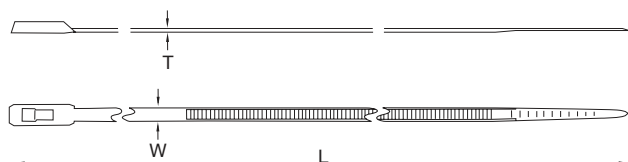

	Dimensions		
	L [mm]	T [mm]	W [mm]
NCA 0-100	432	1.8	4.8
NCA 0-125	450	2	8
NCA 0-185	610	2	9
NCA 0-246	812	2	9
NCA 0-270	914	2	9
NCA 0-380	1219	2	9
NCA 0-46	160	1.6	4.7
NCA 0-55	200	1.6	4.7
NCA 0-89	310	1.6	4.7
NCA-BL 0-46	160	1.6	4.7
NCA-BL 0-55	200	1.6	4.7
NCA-BL 0-89	310	1.6	4.7

Type	Minimum Tensile strength values		
	[N] 21°C	[N] +80°C	[N] -40°C
NCA 0-100	220	165	165
NCA 0-125	530	413	413
NCA 0-185	800	600	600
NCA 0-246	800	600	600
NCA 0-270	800	600	600
NCA 0-380	800	600	600
NCA 0-46	220	165	165
NCA 0-55	220	165	165
NCA 0-89	220	165	165
NCA-BL 0-46	220	165	165
NCA-BL 0-55	220	165	165
NCA-BL 0-89	220	165	165