



Roof curbs type RC-I


Roof curb for a flat roof for **ARU, ARU-EC, ARFV-S, KRFI-S, RFIS-EC**

Application

- For direct placement on flat roof
- RC-I for pitched roofs (3 ° - 24 °) possible on request

Composition

- The **RC-I** is made of aluminium with 30 mm insulation.
- The non-return valve **RAS**, flexible sleeve **RFC** and counter flange **RIF** can be mounted in the RC-I

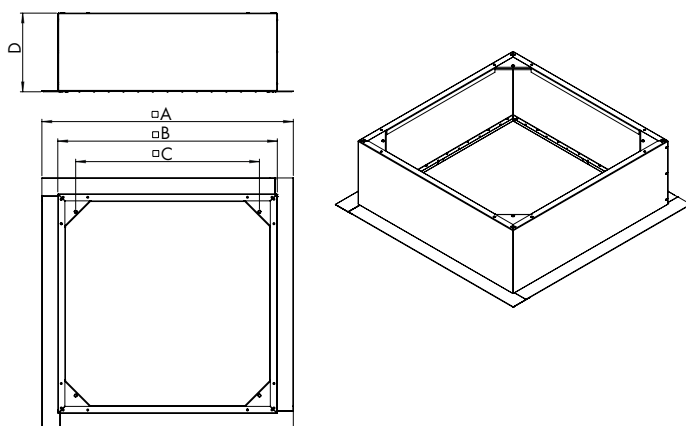

Roof fans

Type	Dimensions			
	A [mm]	B [mm]	C [mm]	D [mm]
DOS 25	390	290	630	250
DOS 31	390	320	630	250
DOS 35	490	410	690	250
DOS 40	640	560	840	250
DOS 45	640	560	840	250
DOS 50	750	670	950	250
DOS 56	750	670	950	250
DOS 63	920	830	1120	250
DOS 71	920	830	1120	250
DOS 75	920	830	1120	250

	Dimensions				
	A [mm]	B [mm]	C [mm]	D [mm]	[kg]
RC-I 190-250	430	300	245	320	2.9
RC-I 280-315	526	396	330	320	3.9
RC-I 355-400	685	555	450	320	5.0
RC-I 450-500	744	614	535	320	6.0
RC-I 560-630	1026	896	750	320	9.0
RC-I 710	1115	985	840	320	33.5