




Flexible connector type RFC

Flexible connector for **ARU-S**, **ARU-S EC**, **ARFV-S**, **RFIS-EC** or **KRFI-SN**

Composition

- Flanges made of galvanised steel sheet
- Flexible connector made of PES
- Max. temperature +75°C

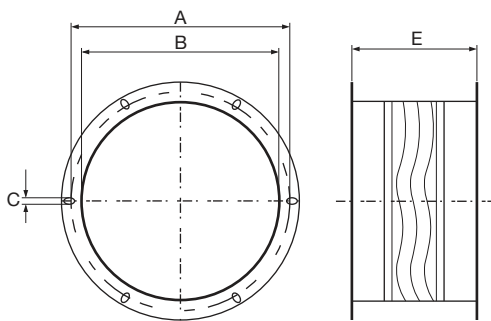

Dimensions					
Type	A [mm]	B [mm]	C [mm]	D [mm]	Weight [kg]
VG 25	280	257	125	200	1.50
VG 31	330	307	150	250	1.90
VG 35	410	380	200	315	3.10
VG 40	500	471	220	350	3.80
VG 45	500	471	220	350	3.80
VG 50	590	550	270	450	5.20
VG 56	590	550	270	450	5.20
VG 63	700	665	300	500	7.90
VG 71	700	665	300	500	7.90
VG 75	700	665	300	500	7.90

Dimensions					
	A [mm]	B [mm]	C [mm]	E [mm]	[kg]
RFC 180 - 250	217	183	8	95...130	1
RFC 280 - 315	286	252	10	95...130	1.50
RFC 355 - 500	438	402	10	95...130	2.30
RFC 560-630	605	569	10	95...130	4.50
RFC 710	674	635	10	95...130	5