

Grilles for galva ducts

SDN-VH GALVA

- Grilles for rectangular ducts
- Galvanized steel
- Galvanized natural finish
- Horizontal and vertical blades



Double deflection grilles for rectangular duct type SDN-VH GALVA

Double deflection grille for rectangular duct mounting with adjustable blades made of galvanized steel

Brand

- Cairox

Application

- For air supply and exhaust in ventilation and air conditioning systems.

Material

Galvanized steel

Colour

- Galvanized steel
- Other colours available upon request

Composition

- Double row of deflection blades, vertical in front and horizontal in back

Mounting

- Visible screw mounting on rectangular duct

Accessories

- Volume control damper **DWN**

Order example

- **SDN-VH GALVA, 400, 100 + DWN**

Explanation

SDN-VH GALVA = Grille type

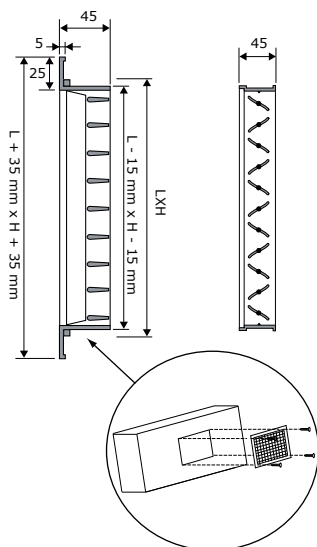
400 = Length

100 = Height

Accessories (Optional)

DWN = Volume damper

Grilles for galva ducts

SDN-VH GALVA DWN


SDN-VH	LxH	Quick selection												
		200x100	300x100	400x100	300x150	500x100	400x150 600x100	500x150	800x100 400x200	600x150	1000x100 500x200	800x150 600x200	1000x150 800x200	1000x200
Q	Ak	0.0088	0.0144	0.02	0.0228	0.0256	0.0311	0.0395	0.0423	0.0479	0.0534	0.0646	0.0813	0.1092
100	Vk	3.2	1.9	1.4	1.2	1.1								
	X0,25	3.1	2.4	2.1	1.9	1.8								
	Ps	4.3	1.6	0.8	0.6	0.5								
	Lw(A)	<20	<20	<20	<20	<20								
150	Vk	4.7	2.9	2.1	1.8	1.6	1.3	1.1						
	X0,25	4.7	3.7	3.1	2.9	2.7	2.5	2.2						
	Ps	9.8	3.6	1.9	1.5	1.2	0.8	0.5						
	Lw(A)	31	<20	<20	<20	<20	<20	<20						
200	Vk	6.3	3.9	2.8	2.4	2.2	1.8	1.4	1.3	1.2	1			
	X0,25	6.2	4.9	4.1	3.9	3.7	3.3	2.9	2.8	2.7	2.5			
	Ps	17.4	6.5	3.4	2.6	2.1	1.4	0.9	0.8	0.6	0.5			
	Lw(A)	38	27	20	<20	<20	<20	<20	<20	<20	<20			
300	Vk		5.8	4.2	3.7	3.3	2.7	2.1	2	1.7	1.6	1.3	1	
	X0,25		7.3	6.2	5.8	5.5	5	4.4	4.3	4	3.8	3.5	3.1	
	Ps		14.6	7.6	5.8	4.6	3.1	1.9	1.7	1.3	1.1	0.7	0.5	
	Lw(A)		38	31	28	26	21	<20	<20	<20	<20	<20	<20	
400	Vk		7.7	5.6	4.9	4.3	3.6	2.8	2.6	2.3	2.1	1.7	1.4	1
	X0,25		9.7	8.3	7.7	7.3	6.6	5.9	5.7	5.3	5.1	4.6	4.1	3.5
	Ps		26.1	13.5	10.4	8.2	5.6	3.5	3	2.4	1.9	1.3	0.8	0.5
	Lw(A)		46	39	36	33	29	24	22	<20	<20	<20	<20	<20
600	Vk				7.3	6.5	5.4	4.2	3.9	3.5	3.1	2.6	2.1	1.5
	X0,25				11.6	11	10	8.8	8.5	8	7.6	6.9	6.2	5.3
	Ps				23.4	18.6	12.6	7.8	6.8	5.3	4.3	2.9	1.8	1
	Lw(A)				47	44	40	35	33	31	28	24	<20	<20
800	Vk						7.1	5.6	5.3	4.6	4.2	3.4	2.7	2
	X0,25						13.3	11.8	11.4	10.7	10.1	9.2	8.2	7.1
	Ps						22.4	13.9	12.1	9.5	7.6	5.2	3.3	1.8
	Lw(A)						48	43	41	38	36	32	27	20
1000	Vk							7	6.6	5.8	5.2	4.3	3.4	2.5
	X0,25							14.7	14.2	13.4	12.7	11.5	10.3	8.8
	Ps							21.8	19	14.8	11.9	8.1	5.1	2.8
	Lw(A)							49	47	44	42	38	33	26
1200	Vk								7.9	7	6.2	5.2	4.1	3.1
	X0,25								17.1	16	15.2	13.8	12.3	10.6
	Ps								27.4	21.3	17.2	11.7	7.4	4.1
	Lw(A)								52	49	47	43	38	31
1600	Vk											6.9	5.5	4.1
	X0,25											18.4	16.4	14.2
	Ps											20.9	13.2	7.3
	Lw(A)											50	45	39
2000	Vk												6.8	5.1
	X0,25												20.5	17.7
	Ps												20.6	11.4
	Lw(A)												51	45
2400	Vk													6.1
	X0,25													21.2
	Ps													16.5
	Lw(A)													50

Symbols and specifications

- LxH = Width L and height H in mm
- Q = Air volume in m³/h
- Ak = Effective surface (free area) in m²
- Vk = Average effective velocity through the grill in m/s
- X0,25 = Horizontal throw in m at an end velocity Vt of 0.25 m/s
- Ps = Static pressure loss given in Pa
- Lw(A) = Acoustic power in dB(A)
- The throw X0.25 is given without deflection of the airstream at an end velocity of 0.25m/s. The distances are given for

Grilles for galva ducts

a smooth ceiling and installation distance of the center of the grille at 300mm from the ceiling surface. When mounted at a distance of 400 to 600 mm from the ceiling, a horizontal deflection towards the ceiling of 15° is advised. When mounted at a distance larger than 600mm from the ceiling, the throw distance X0.25 will be smaller than mentioned due to the missing coanda effect. In these cases and for all other special requirements, please contact our engineering office.

- The values are given for isothermal supply air. Throw distances for cooling conditions at -11K can be calculated by dividing the X0.25 values with factor 1.1. For heating purposes at Dt of +11K a multiplier of 1.1 should be applied to the given X0.25 value.
- Advised mounting distance between centers of multiple grilles in the same wall should be greater than 1/3 of the throw length X0.25 (without spread).
- The pressure losses Ps are given for grilles without damper or with fully opened damper.
- The acoustic powers Lw(A) are given for grilles without damper or with fully opened damper without room attenuation. Acoustic powers below 20dB(A) are mentioned as "<20" in the tables.